



Rugged, Economical



Mechanical Outline

Technical drawing of a rectangular structure, likely a component or assembly, showing dimensions and labels.

Dimensions:

- Top horizontal dimension: 19.00
- Top horizontal dimension: 18.00
- Bottom horizontal dimension: 17.00
- Right vertical dimension: 18.25
- Right vertical dimension: 7.00
- Right vertical dimension: 4.00
- Right vertical dimension: R.14
- Bottom right corner dimension: .13


Labels:

- RF IN
- RF OUT

- Thermal shutdown above 50 C
- Current limit provides amplifier and system protection
- Front panel indicators
- Forced air cooling system (self-contained fans)



Tel: 208 640 9412
Fax: 480 393 5947
info@lcfamps.com

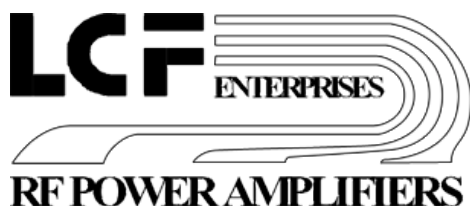

MODEL B020 **RACKMOUNT SYSTEM** **120-170 MHz** **200 Watts**



Rugged, Economical

P/N 170-120-200-40-RM

Our solid-state amplifier systems are self-contained and fully protected. The system includes a power supply, amplifier module, cooling, additional protection features (see below), front panel indicators and monitors. The system can stand alone on a bench or be rack mounted.

GENERAL SPECIFICATIONS



Size: 19.00" x 18.00" x 7.00" (W x L x H)
 47.5 cm x 45 cm x 17.5 cm
 Weight: 25 lbs (11.34 Kg)
 Cooling: Forced air (self-contained fans)
 AC Power: 120 VAC - 60 Hz / 240 VAC - 50 Hz
 RF Connectors: Type N Female
 Panel Display: RF In, RF Out, Current Meter, Blanking (optional),
 Thermal Shutdown, Power Light, Over Current
 Warning, Fuses



RUGGED PROTECTION SYSTEM

The amplifier rack-mount system has multiple protection features which provide rugged, reliable operation under conditions of amplifier abuse. Specifically,

1. The amplifier module has been designed to have intrinsic protection against bad loads. Also, the module is operated at 24 VDC instead of its rated 28 VDC for an extra **margin of safety** from voltage breakdown.
2. The amplifier system has **automated current limiting**. A current limiting condition may arise when operating into a high VSWR load. The system will not shut down under current limiting conditions and will continue to operate and automatically and transparently recover.
3. Electrical **fuse protection** is also provided to protect the amplifier module in the event the system is overdriven by a fast pulse which exceeds the response time of the automatic current limiting.

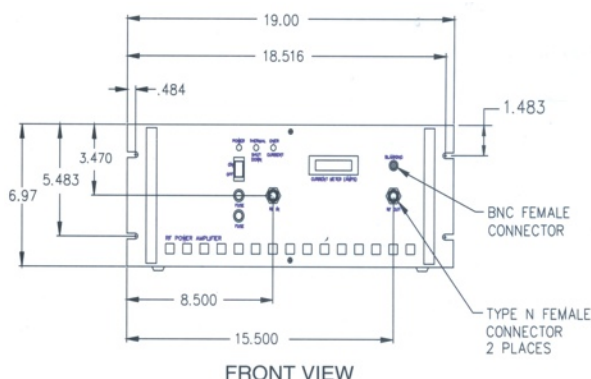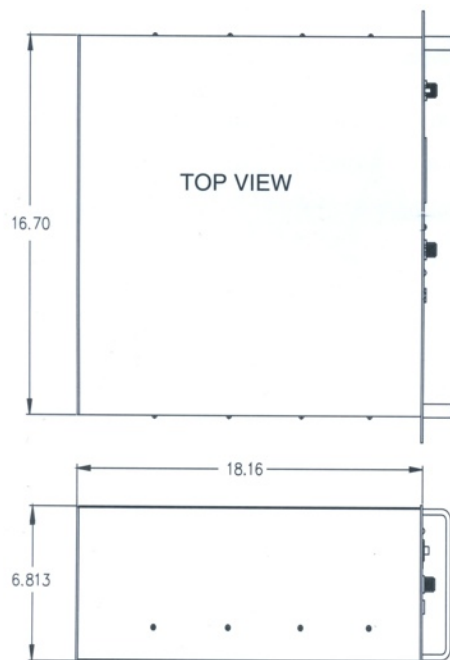

LCF Enterprises
 764 S. Clearwater Loop
 Post Falls, ID 83854
www.lcfamps.com

MODEL B020
P/N: 170-120-200-40-RM

Tel: 208 640 9412
Fax: 480 393 5947
info@lcfamps.com